



GREASES THAT WORK

AS HARD AS YOUR MACHINES

XTREME™ General Purpose Grease #2

Xtreme General Purpose Grease is compatible with lithium and lithium complex greases and engineered to provide outstanding water resistant and rust and corrosion protection. This product is compatible with lithium and lithium complex greases.

PREMIUM BASE OILS


We begin with virgin base oils that provide excellent performance and pumpability in cold temperatures, resists oxidation, and retains film thickness as temperatures vary during operation.

FORTIFIED WITH SPECIAL POLYMERS

Our polymer package reduces oil separation and stays in application longer while resisting water washout. General purpose lubricant for farms, industrial, and marine applications where water resistance is desired.

CALCIUM 12-HSA THICKENERS

Calcium based thickener provides improved water resistance along with superior rust and corrosion protection.

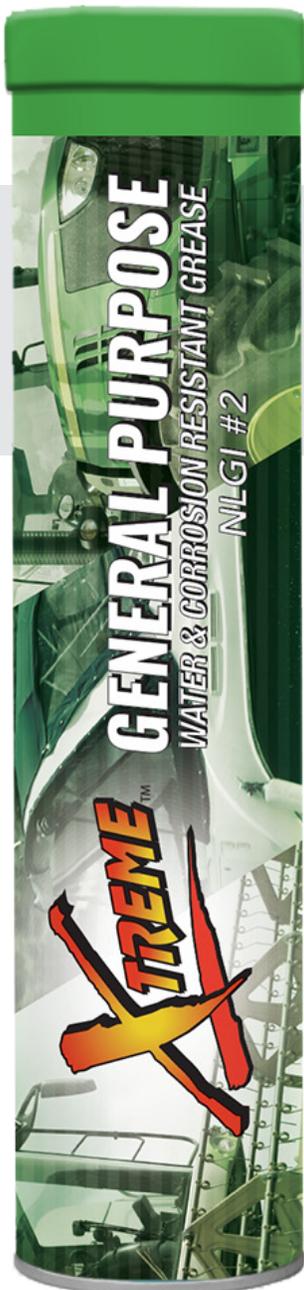

TYPICAL PROPERTIES	ASTM Test Method	Multi-Purpose Hi-Temp Grease #2
Thickener		Calcium 12-hydroxystearate
NLGI Grade		2
Texture	Visual	Smooth, Tacky
Color		Amber
Dropping Point, °C (°F)	D-2265	188 (370)
Penetration		
• Worked 60 strokes	D-217	275
Water Spray-Off, % wt.	D-4049	28
Base Oil Viscosity @ 40°C, cSt	D-445	150
Oxidation Stability, psi 100 hrs.	D-942	5
Rust Preventative Properties	D-1743	PASS
Four-Ball Weld Point, KGF	D-2596	315

Part Numbers for Xtreme General Purpose Grease #2				
40/14 oz	1/35#	1/120#	1/400#	Bulk
503805	574602	574611	574688	501778

The information on this Product Data Sheet is believed to be accurate and is typical of current production. Specifications are subject to change without notice. For additional qualifications, please contact your Martin Lubricants Sales Representative. (03/2020)